

# ALTO®

EQUIPMENT AND ENGINEERING FOR THE BAKING INDUSTRY

## AIRGRIP® BREAD DEPANNER

• **Model AD-II**

For In-Line Depanning At Any Speed Up To  
200 Loaves Per Minute And More

### SPECIAL FEATURES & ADVANTAGES

**LARGE RADIUS VACUUM CHAMBER**—assures gentle handling of bread from pan to discharge conveyor.

**ONE PIECE 4-PLY VACUUM CUP BELT**—eliminates dirt traps. Assures sanitary, efficient operation without necessity of oiling.

**EASY ADJUSTMENT OF PRODUCT DISCHARGE CONVEYOR**—by convenient, readily accessible hand wheel control.

**PRODUCT DISCHARGE CONVEYOR BELT**—of molded neoprene that provides traction to overcome product slippage and damage.

**HIGH PRESSURE, LOW VOLUME VACUUM SYSTEM**—complete with totally enclosed fan-cooled 7½ H.P. motor.

**CONVENIENT VACUUM ADJUSTMENT**—by hand wheel control for instant setting of vacuum from 0 to maximum requirement.

**INSTANT VARIABLE SPEED CONTROL**—by hand wheel on 1½ H.P. mechanical drive for all conveyors.

**EASY-CLEAN DUST & SEED COLLECTOR**—with removable drawer for fast, sanitary maintenance.

**INDEPENDENTLY CONTROLLED TWO NOZZLE AIR JET SYSTEM**—provides adjustment to loosen bread in pans. Complete with 25 micron air filter.

**HEAVY DUTY PLATE TOP PAN CONVEYOR**—incorporated as standard equipment. Complete with magna rail hold down.



**INSTANT PAN GUIDE ADJUSTMENT**—by convenient hand wheel control.

**SOUND SUPPRESSOR**—exclusive ALTO® design for the quietest depanner you can buy. Patents pending.

**SELF CONTAINED ELECTRICALS**—include magnetic motor starters with thermal overload protection and push button controls.

all specifications subject to change without notice


### The Gentle Depanner That Eliminates Product Damage

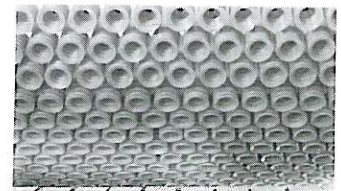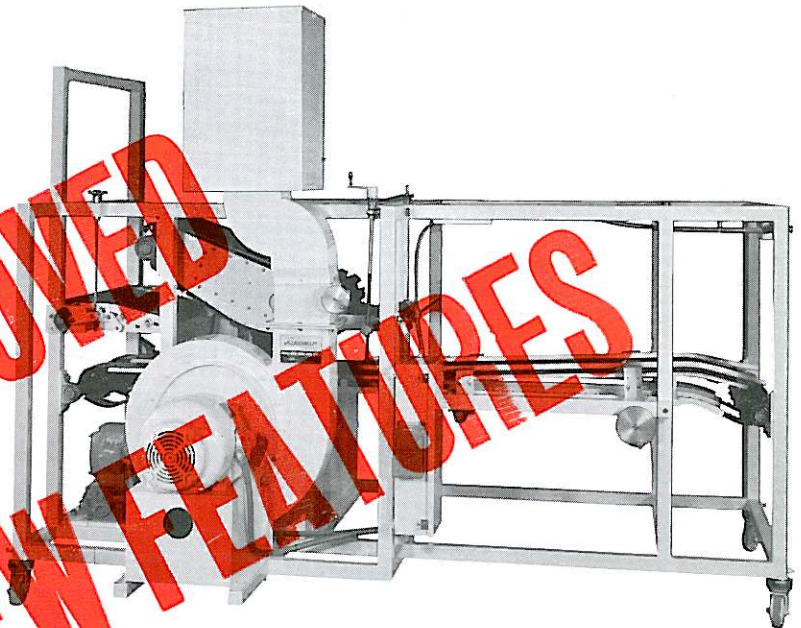

**ALTO® VACUUM CUPS  
FOR GENTLE DEPANNING**

Easy does it with ALTO's unique silicone rubber vacuum cups. These resilient cups cling firmly to bread surfaces and gently lift the loaves without damage. This foolproof ALTO depanning method assures top product quality.

**Exclusive ALTO® Hand Wheel Controls . . . Convenient And  
Easy . . . Permit All Adjustments To Be Made Instantly!**

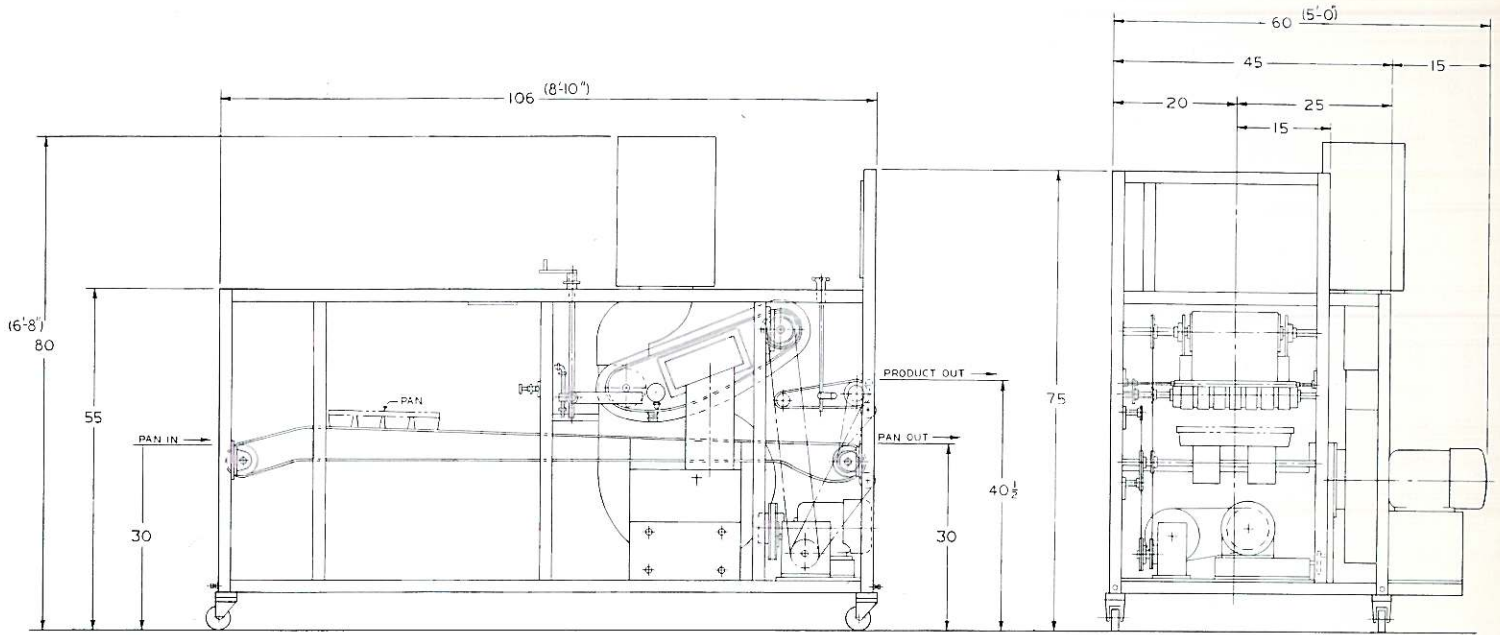

SPECIFICATIONS	
CAPACITY	200 LPM
MAXIMUM PAN WIDTH	18
PROD. DISCH. CONV. WIDTH	18
VACUUM FAN MOTOR	7 1/2 HP
CONVEYOR MOTOR	1 1/2 HP
SHIPPING WEIGHT	2925#

**BISS CERTIFIED CONSTRUCTION**

## OPTIONAL EQUIPMENT

### **INFEEED METERING CONVEYOR**

Accessory conveyor—4' long—for even flow of product to the cooler. Powered by depanner drive motor.

### **MAGNETIC DELIDDER**


Accessory delidder can be installed in AD-II frame at any time.

### **FRAME BASES**

Accessory bases to elevate depanner for special height requirements.

### **CASTERS (as illustrated)**

BISS certified swivel casters.

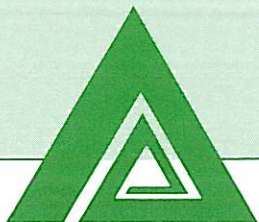

**alto corporation**

333 Seventh Avenue • York, Pa. 17405 • phone 717-854-9561 • cable ALTO