

Model LM-1000 Shown



Models

LM-600
LM-850
LM-1000



Automatic Proofer Tray Loader

Topos Mondial now offers an automatic proofer loader. The automatic loading provided by the shuttle box not only eliminates misaligned product, drastically reducing downtime, but also prevents the operator from having to spend as much time and energy hand-loading the proofer. This means that the Topos Proofer can be safely and easily loaded using less manpower, and work injury probability is greatly reduced over time.

The Load Master 600 has a 600 millimeter loading tray which allows for 6 full-sized doughnuts along its width. The LM-850 has an 850 millimeter loading tray which allows for 8 full-sized doughnuts along its width. Similarly, the LM-1000 has a 1000 millimeter loading tray which allows for 10 full-sized doughnuts along its width. Both models utilize fully adjustable ambidextrous on-the-fly controls, for left and right-handed operator working positions. Simplified maintenance, heavy duty construction, and super sanitary design are all pro-components of this product.

toposmondial.com

Standard Features


*Model LM-850 Shown

Up to four inches of adjustment via hand-knobs for rapid adjustment relative to the sheeting system infeed, for "flip", "no-flip", loading of the product onto the proofer tray.

Full-stainless frame houses linear guides fitted to high-load rollers, allowing the shuttle box to cycle at an extremely high rate over a very long service life.

Overhead sanitary worm gearbox allows for six inches of vertical adjustment to tune the flip characteristics of the product arriving from the sheeting system/feed conveyor.

Available in three sizes for 6, 8, or 10 full-sized doughnuts along its width.

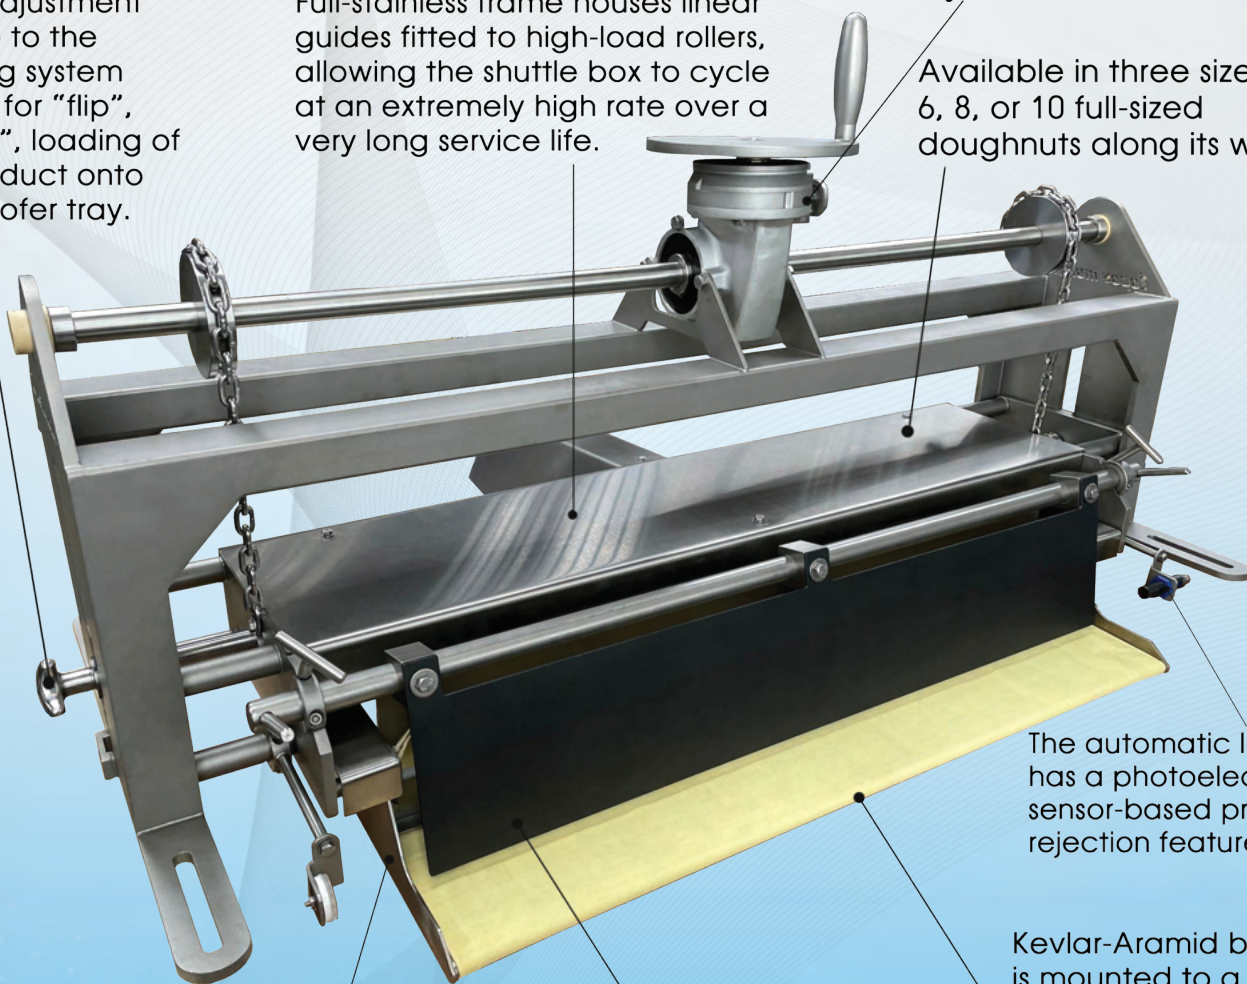

Full stainless steel loading tray is optimized for weight, increasing retraction and return speed, decreasing drive system wear, and allowing for high-speed loading scenarios.

Adjustable positions Teflon-coated backboard for product alignment.

The automatic loader has a photoelectric sensor-based product rejection feature.

Kevlar-Aramid belt is mounted to a stationary, modular mounting bar that is easily removed with three bolts by a single operator.

toposmondial.com

600 Queen St. Pottstown, PA, USA +1-610-970-2270

